


20120305_16071503 C:\Documents and Settings\Ron PIM\Documents\My Dropbox\Public\RS-1 ISL.dwg

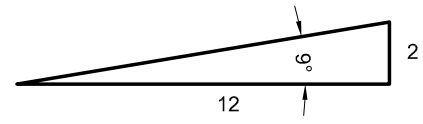

INSTALLATION NOTE:
RECOMMENDED MINIMUM PITCH OF 2:12
TO PREVENT POOLING WATER ON GLASS

1/16" EPDM CLOSED CELL
BEDDING TAPE (CONT.)

RS-3 EXTRUDED ALUMINUM SILL
CAP, MITERED AND WELDED AT
CORNERS

#10 X 5/8" PAN HEAD
SCREW AT 18" O.C.

1/4"Ø WEEP SLOTS
(ONE PER SIDE AT
CORNERS)

SHIM AS REQUIRED

RS-1 EXTRUDED
ALUM. PERIMETER
FRAME, MITERED
AND WELDED AT
CORNERS

#10 x 2" SCREW
NOTE:
SCREW TO CURB
IN EACH HOLE
PROVIDED

1/2"

INSTALLATION NOTE:
* SET SILL ON FOAM
WEATHER TAPE OR
NON-SETTING CAULK



SILL



1055 TERMINAL WAY
SAN CARLOS, CA 94070
PHONE: (650) 637-1440
FAX: (650) 637-9770